

BARRIER-FREE BATHROOMS



Art.-Nr.: 03507/131302 Barrierfreie Bäder, englisch, 02/2018

PLAN 6–37
IXMO 38–49
ELEGANCE 50–59
meTime_spa 62–67

PRODUCT OVERVIEW 70–105

All products in this brochure come with a 5-year guarantee. KEUCO guarantees the availability of PLAN products until 2030.



A FASCINATION FOR THE BATHROOM



Engelbert Himrich, Managing Partner



Hartmut Dalheimer, Managing Director



Sensuousness and sensibility – KEUCO’s passion for the bathroom runs through its veins, and this is evident in our products. A KEUCO bathroom awakens the emotions. It is an intimate place of well-being. It conveys elegance and luxury, and it combines aesthetics, ergonomics and functionality.

In no other room is this challenge more exciting and demanding than the bathroom. That is why this fascination still drives us forward. Since its founding in the year 1953, our company, which is still family-run today, has undergone a rapid and sustained transformation. From market leader for high quality bathroom accessories, KEUCO has evolved into the brand for the bathroom, with a wide assortment of furniture, fittings, accessories and mirror cabinets and from our early days we focused on offering concepts of complete bathroom furnishings.

Important factors contributing to our success are the contemporary, technically innovative products, the highest standard of quality, a clear orientation towards design, and state-of-the-art manufacturing facilities. Today, KEUCO products are sold around the world, and are market leaders in many areas. They are the result of intensive development work, the use of the best materials, and the most careful workmanship. We combine high-tech manufacturing and involved hand craftsmanship to achieve optimum results. KEUCO quality sets standards: Our products will convince you by their immaculate surfaces, maximum longevity, and perfect functionality. Each article is examined individually before being shipped out.

At KEUCO, the subject of design already played a pivoting role long before it even became a general topic of conversation. Our understanding of design involves striving to achieve classic-modern aesthetics that retain their contemporary feel, even after many years of use. Whether designed in-house or in cooperation with internationally recognized designers – KEUCO products are regularly distinguished by renowned awards.

Longevity has another definition when it comes to KEUCO products. Getting older brings a higher level of comfort desired for in the bathroom. When it comes to design, KEUCO is a leader for barrier free bathroom solutions which harmoniously combine functionality, ergonomics and aesthetics into one putting the human being into the centre point.

But timeless design and long-lasting product quality are only two aspects of our sustainability philosophy. Equally important are responsible company management, and resource-saving production – with the help of our own water conditioning system for our electroplating plant, for example. We view the label “Made in Germany” as commitment to the kind of company management that aims to secure jobs in the long term.


KEUCO products are made in our own production plants in Hemer, Gütersloh and Bünde. Inland production provides us with a close proximity that is essential, so that we can develop and utilize the know-how of our employees on a long term basis, and so achieve seamless quality management. And that makes “Made in Germany” a promise of quality.

PLAN

THE EVOLUTION OF COMFORT



TIMELESSLY MODERN AND INCREDIBLY VERSATILE

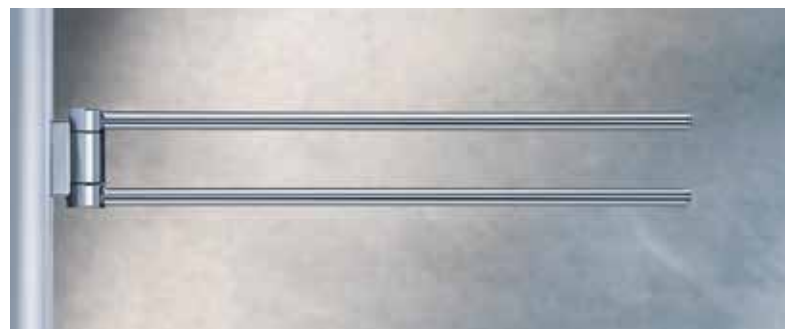

With 450 individual products, PLAN is one of the most extensive bathroom collections in the world. PLAN is as varied as the lifestyles of today and the breadth and depth of its large assortment enables individual, tailored solutions to be found. PLAN leaves nothing to be desired – not from an aesthetic or an ergonomic point of view, as the main focus of the PLAN care range offers an additional wide collection of barrier-free products to choose from.



DESIGN PLUS

.molldesign
Reiner Moll



EYECATCHER IN EVERY BATHROOM



The wide range of surface variants multiplies the diversity of PLAN even more. Choose from chrome-plated, aluminium and stainless steel.



On the left you can see the PLAN blue fitting with a swivel spout – perfectly suited for the private and project area. Either as a one hand mixer or pillar tap, PLAN blue convinces with a slim design and precise language of shape. PLAN blue fittings are available with 3 different spout lengths and therefore match different washbasins fulfilling individual needs – this offers more freedom of movement when washing. The XL version is particularly suited for top-mounted washbasins or is a perfect solution for washing your hair in the washbasin. PLAN blue fittings offer high energy efficiency and a low flow rate of 6 l/min and is WELL certified.

WELL Home
Water Efficiency Label

Manufacturer:	KEUCO
Product category:	Wash basin valve
Type:	Single lever valve
Model:	Plan Blue
Registration number:	WA10006-20100816

A

B

C

D

A**




HIGH QUALITY, CONVENIENT, BEAUTIFUL AND SAFE



The 45 mm wide PLAN CARE tip-up seat with the ergonomic foam soft-seat meets the requirements of DIN 18040-1 and is suitable for public sanitary rooms. The PLAN rail system not only serves the purpose of a shower rail and towel holder but at the same time offers a stable grab bar.



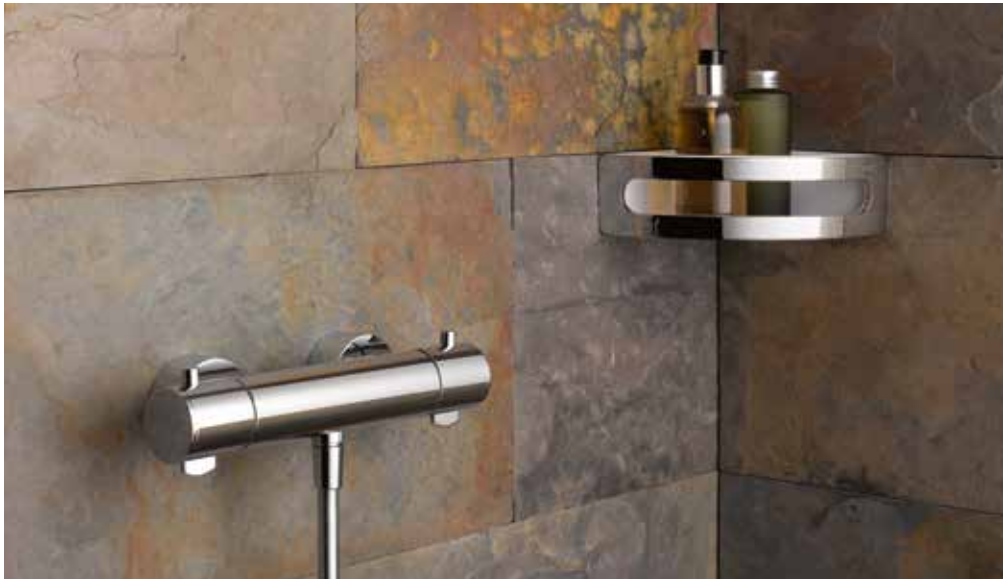

A corner solution for the shower that leaves nothing wanting. The rail system serves as a shower rail, a stable grab rail as well as a holder for a mountable tip-up shower seat. The matching sponge basket for corner installation rounds everything off.



The accessories combine functionality and aesthetics thanks to their diverse options and sophisticated design. Numerous shower seat options in different colours round the extensive range off. Choose between tip-up seats with or without a back rest. What they all have in common is an ergonomically shaped seat.









Ergonomic, aesthetic, resilient: The PLAN foldable support grab bar is not only nice in its shape but is just as stable.





You make the plans and PLAN will accompany you – the shower curtain rail sets offer possibilities for every eventuality. One of many examples for ideal usage: The wall fixing with cover plate can be adapted for different slanted ceilings from 10° to 80° inclination. The PLAN shower curtains are just simply nice – and to that they are anti-bacterial, fungicidal, shower tight and anti-static. A special PLAN shower curtain for bathrooms which underlie strict fire protection requirements is also available – “highly inflammable”. In addition to that you can choose from different colours.

Colour variations shower curtain

	white PLAN uni and PLAN maxx
	light grey PLAN uni
	ecru PLAN uni
	truffle PLAN uni
	anthracite PLAN uni
	off-white PLAN Flame CS







In the WC area it is plain to see that with PLAN, design and accessibility merge into an integrated unit: Uncompromising functionality with many intelligent details combine with ease into an autonomous, elegant aesthetic. The PLAN pivoted supporting rail for WC is also available as variation with an electronic remote controlled flush system (see picture above).

Thanks to the restricted mechanic the PLAN CARE foldable support grab bar smoothly folds downwards. The WC back rest is hung into the wall rail and stands in a stable upright position by means of a wall distance spacer.



CLEAR LANGUAGE OF FORM



The PLAN INTEGRAL wall integration modules for wash-basin and WC are extremely well-suited for heavily frequented public sanitary facilities. Not only do they convince through their advantages such as easy cleaning, sturdiness and easy refilling, but they also come in an elegantly discreet design.

LESS CAN DO MORE



MINIMALISM IN THE SHOWER



With the new member of the IXMO family, the motto “less can do more” has never been so true. IXMO SOLO is truly a functional wonder: The impressive thing about this little module is its intelligent combination of innovative technology and minimalist design.

The result is a fitting that uniquely combines a single-lever mixer and hose connection. Minimum installation work, maximum convenience – because only IXMO SOLO and no further water-conducting elements is all that is required for a complete shower solution.

The IXMO SOLO product design is so consistent and small that a picture of perfection is produced in every shower. And with the round or rectangular decor disc options, IXMO SOLO also perfectly matches all other KEUCO lines.



WATER WILL FIND ITS WAY

For planners and architects, the IXMO concept isn't just about minimalist design, it is especially about maximum design freedom. Because, with the existing IXMO components and the new IXMO SOLO single-lever mixer, different installation types can now be impressively realised for the private household, the multi-family unit or the hotel branch.



The **one-way installation** with IXMO SOLO reduces the installation work to one water-conducting element on the wall.



For the **two-way solution** with two outlets, just two proven IXMO modules are required on the wall.



For the **three-way installation**, only two elements are needed on the wall, thanks to the 3-way stop and diverter valve.

IXMO

COMPRESSED FUNCTIONS: 3 BECOME 1

The central concept behind the IXMO fittings for the shower is the concentration of functionality. An IXMO single-lever mixer or thermostat is always combined with multifunctional IXMO elements which, in addition to connections for one, two or three water channels, also compactly unite other functions such as a hose connection, hand shower bracket, stop cock, or selector. This allows the number of products on the wall to be reduced, and enhances the appearance at the same time. Since the individual fitting units can be freely positioned, IXMO offers a high standard of design freedom.

With the IXMO fittings for the shower, KEUCO once again demonstrates its high standard of innovation in design and technology.



A QUESTION OF COMBINATION




Design for multiple styles: Another special benefit offered by IXMO bath fittings is the formal lightness and the clear, geometric contours. They integrate well in a diverse array of furnishing styles. Thanks to the multifunctional features of the modules, IXMO celebrates a fusion between design and function, pointing the way to the future.



IXMO GOES WASHBASIN

If it works impressively in the shower, it will be perfect for the washbasin, too. As such, we have now transferred the IXMO principle to an integrated washbasin fitting. When the wall spout and the single-lever mixer are combined in only one fitting element, as shown here, planning freedom benefits. The in-wall fitting comes with either a round or square decor disc and lends a luxurious, tidy feel to the wash area.

Minimal also aptly describes the installation work involved for all IXMO modules. HVAC pros only need to install one in-wall base structure. With the clever depth-compensation feature, the already shallow installation depth of the washbasin fitting can be flexibly varied anywhere from 70 to 100 mm. Maximum installation intelligence.

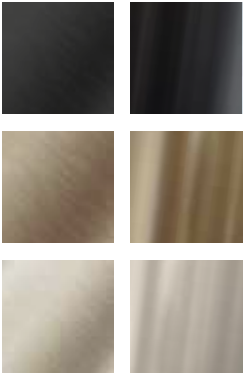

Black Chrome
brushed
polished

Bronze
brushed
polished

Nickel
brushed
polished

IXMO fittings are also available with chrome-plated, stainless steel or aluminium finishes.



ELEGANCE

VARIETY AS PRINCIPLE



THE DESIGN CLASSIC WITH PROFILE

Initially begun in 1967 purely as line of accessories, ELEGANCE established itself internationally over the decades and became the biggest selling bathroom series in the world. Today, ELEGANCE offers a comprehensive assortment with a wide array of models. The demand for ELEGANCE products still remains steady today thanks among other things to its timelessly modern design.



.molldesign
Reiner Moll



EFFUSIVE FLEXIBILITY



Different ways of combining à la carte: ELEGANCE shower solutions can be flexibly matched to every room constellation and of course to suit personal preferences. Hand shower or head shower, on-wall or in-wall – the choice is yours.

Right angles and straight lines, coupled with vibrant curves. As in the entire collection, ELEGANCE fittings convince by their striking, classic-modern design.



THOUGHT-OUT ERGONOMICS



Das ELEGANCE rail system can be combined as needed with the existing bathroom furnishings.



ELEGANCE stands for longevity in every sense. This range has had a timeless beauty for centuries which is consequently reflected in the matching accessories.



SHOWER EXPERIENCE FOR THE SENSES



SOOTHING AND REFRESHING SHOWERS




The element of water has always fascinated people. It is particularly fascinating when it takes the form of a waterfall. The aesthetic meTime_spa dousing shower can bring this experience into your own bathroom. The feeling of taking a shower under a waterfall – of allowing the primal power of water act on you – is relaxing for your mind and soul, too. The water treatments inspired by Sebastian Kneipp are perfect for allowing the soothing and relaying effects of water fall on your skin and muscles. With the SPA hose, you can experience the health-promoting alternating hot and cold showers in the privacy of your own bathroom at home and at your leisure.



Tesseraux+Partner
Dominik Tesseraux



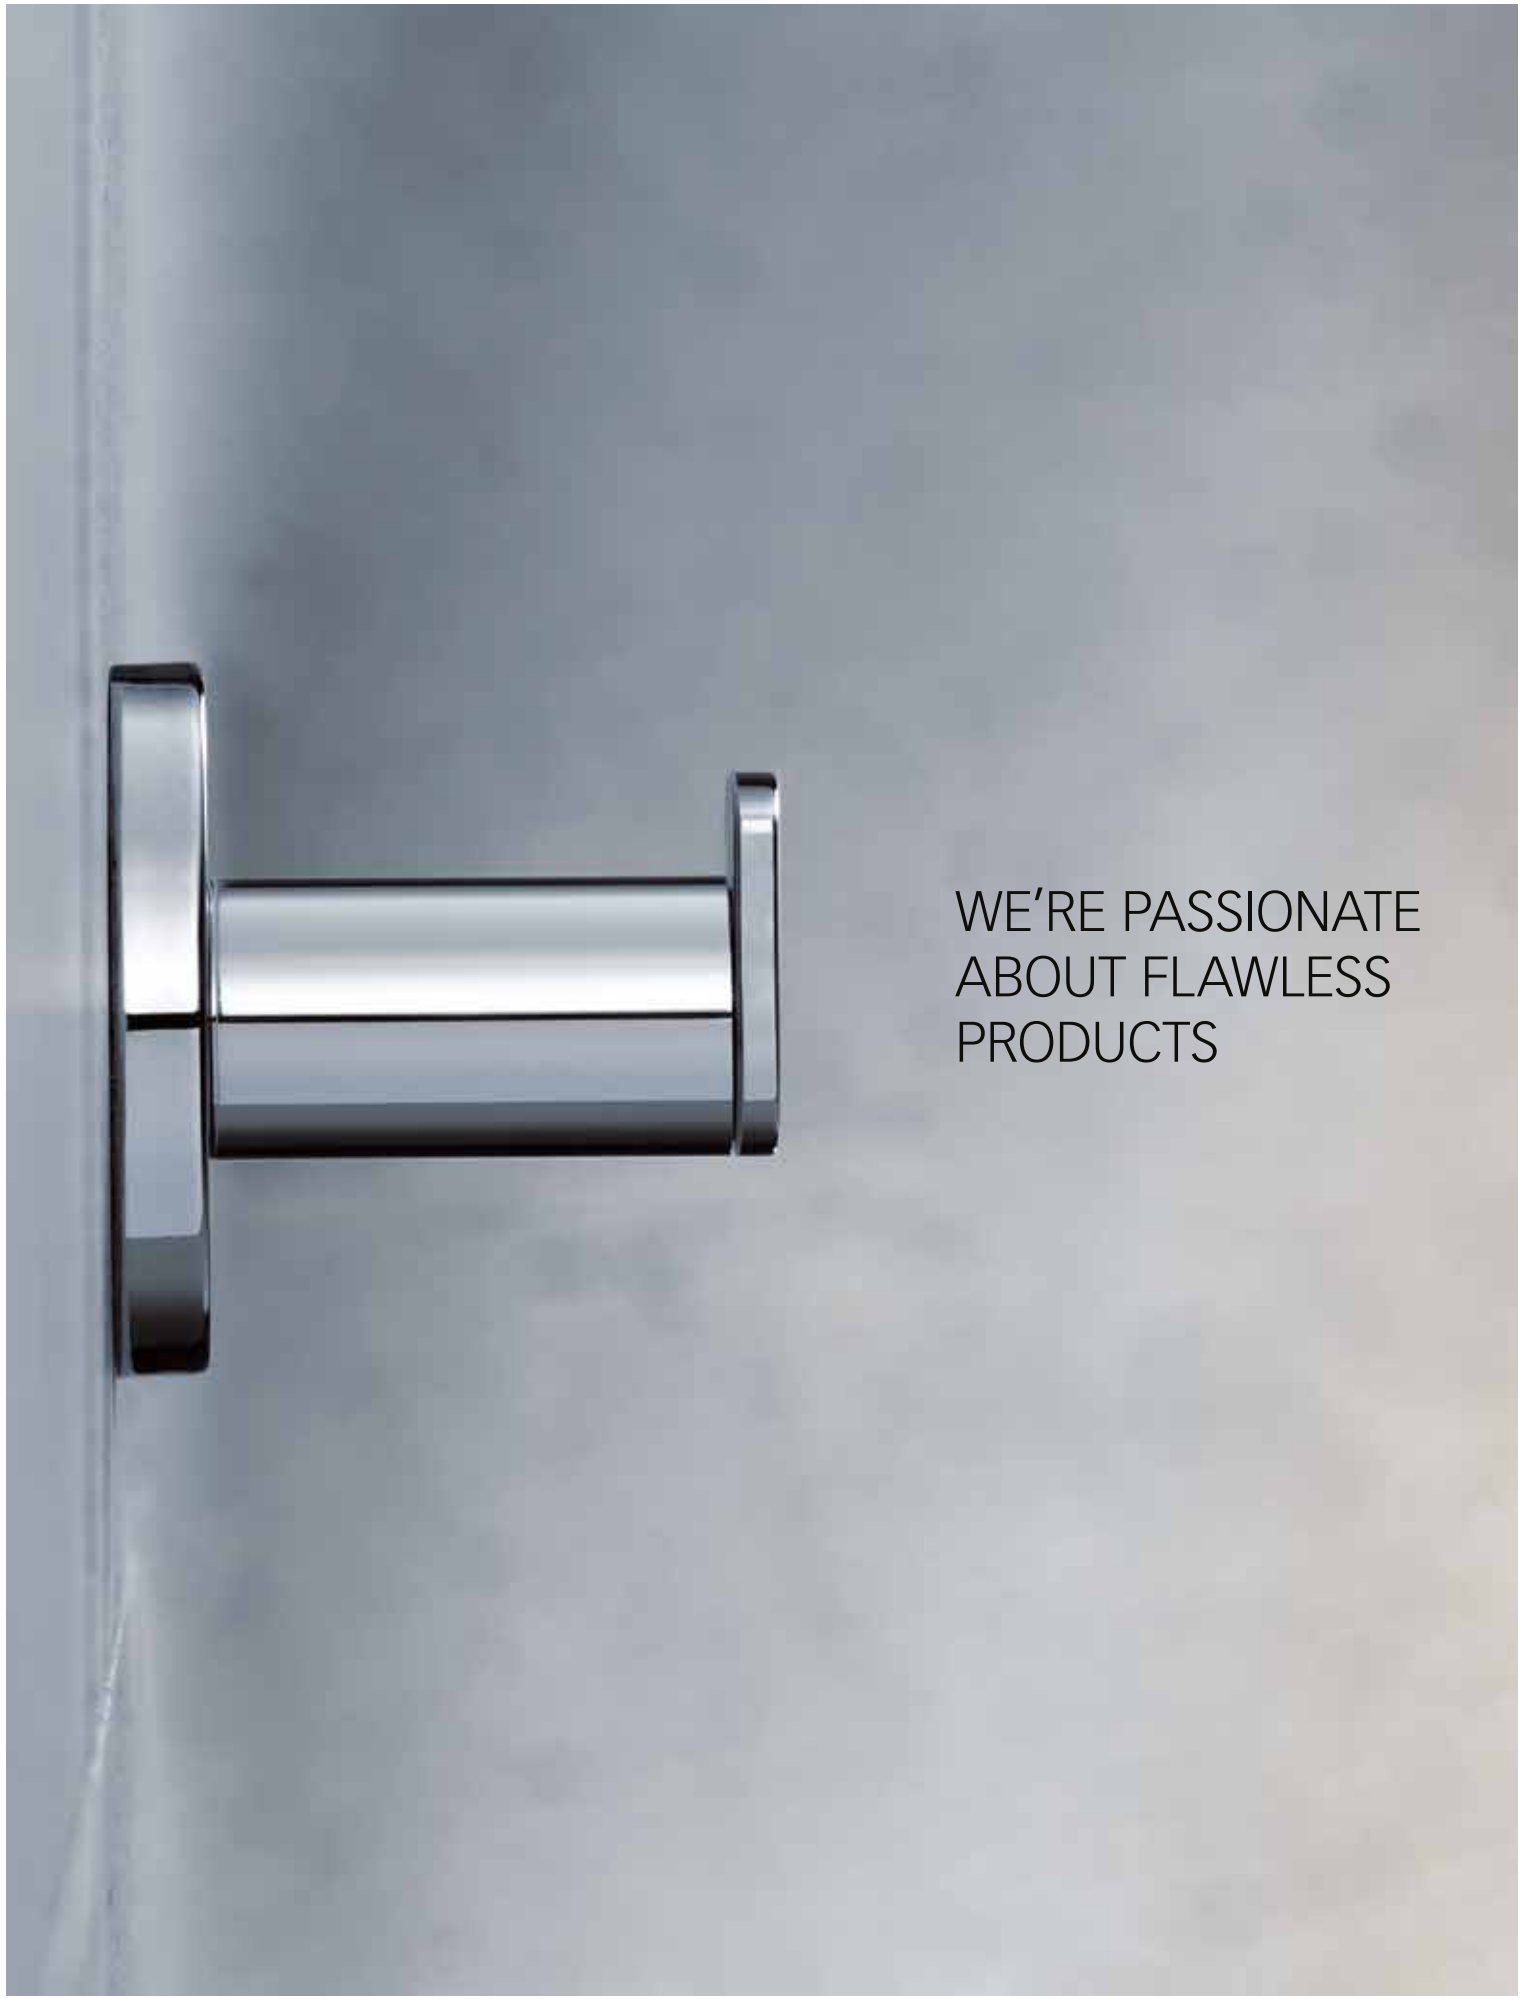


WE'RE PASSIONATE
ABOUT FLAWLESS
PRODUCTS



PRODUCT OVERVIEW

PLAN BLUE

Surface:

chrome-plated



53902



53902



53902



53905



53908



53909



53945



53920



53924

53902
Single lever basin mixer 90
with/without pop-up waste 1 1/4 Inch,
1-hole installation, cartridge mixer with
ceramic sealing gaskets and temperature limiter,
aerator M 24 x 1
adjustable flow angle +/- 8° limiter,
restricted flow rate 6 l/min.
Height: 161 mm
Projection: 107 mm

53905
Single lever basin mixer 200
with/without pop-up waste 1 1/4 Inch,
spout swivelling +/- 60°,
1-hole installation, cartridge mixer
with ceramic sealing gaskets,
aerator M 24 x 1 cache
restricted flow rate 6 l/min.

53945
Bath filler/spout DN20
suitable for all concealed fittings
Projection: 138, 188 mm

53902
Single lever basin mixer 130
with/without pop-up waste 1 1/4 Inch,
1-hole installation, cartridge mixer with
ceramic sealing gaskets and temperature limiter,
aerator M 24 x 1
adjustable flow angle +/- 8° limiter,
restricted flow rate 6 l/min.
Height: 204 mm
Projection: 125 mm

53908
Pillar tap 200
without pop-up waste,
spout swivelling +/- 60°,
1-hole installation, lever head action 90°
with ceramic sealing gaskets,
aerator M 24 x 1 cache

53920
Bath tub mixer DN15
exposed fitting
cartridge mixer with ceramic sealing gaskets,
ceramic stop valve and diverter,
with backflow preventer
wall outlet for shower hose DN15,
restricted flow rate 12 l/min.

53902
Single lever basin mixer 210
without pop-up waste,
1-hole installation, cartridge mixer with
ceramic sealing gaskets and temperature limiter,
aerator M 24 x 1
adjustable flow angle +/- 8° limiter,
restricted flow rate 6 l/min.
Height: 289 mm
Projection: 140 mm

53909
Single lever bidet mixer
with pop-up waste 1 1/4 Inch,
1-hole installation, cartridge mixer
with ceramic sealing gaskets
and temperature limiter,
aerator M 24 x 1
restricted flow rate 6 l/min.

53924
Shower mixer DN15
exposed fitting
ceramic stop valve,
cartridge mixer with ceramic sealing gaskets,
with backflow preventer
wall outlet for shower hose DN15,
restricted flowrate 12 l/min.



53971



53972




54908



54926



53924



54985



54987



59991



51686/51688



51686/51689



54941



54995



53980



54991



53947

53971
Single lever shower mixer
concealed fitting,
set complete with: handle, sleeve, rosette
and installation unit,
suitable for rough part no. 59970 (Flexx Boxx)
(Flexx Boxx to be ordered separately)

54908
Pillar tap 50
without pop-up waste,
1-hole installation, lever head action 90°,
with ceramic sealing gaskets,
aerator M 18 x 1

54926
Thermostat battery for shower
exposed fitting,
handle with 50% water consumption regulation,
safety cut-off at 38°C,
with backflow preventer

53972
Single lever bath tub and shower mixer
concealed fitting,
set complete with: handle, sleeve, diverter,
rosette and installation unit,
suitable for rough part no. 59970 (Flexx Boxx)
(Flexx Boxx to be ordered separately)

53972
Single lever bath tub and shower mixer
concealed fitting,
with safety device,
set complete with: handle, sleeve, diverter,
rosette and installation unit,
suitable for rough part no. 59970 (Flexx Boxx)
(Flexx Boxx to be ordered separately)

53924
Shower mixer with head shower
exposed fitting,
ceramic stop valve and diverter,
cartridge mixer with ceramic sealing gaskets,
with backflow preventer,
head shower swivelling, Ø 180 mm,
restricted flowrate 9 l/min.,
hand shower with normal, soft and massage jet,
with sliding bracket, wall bracket and
shower hose, 1600 mm

54985
Hand shower sliding rail
consisting of:
– wall rail, 800 mm
– sliding bracket for shower head
– height adjustment via handle,
tilting angle adjustable
– spacer disc (5 mm)

54987
Hand shower sliding rail set
consisting of:
– rail with sliding bracket, 800 mm
– height adjustment via handle,
tilting angle adjustable
– spacer disc (5 mm)
– hand shower with normal jet and massage jet
– shower hose, 1600 mm

51686/51688
Overhead shower with wall outlet DN 15
Ø 180 mm, with shower head rail,
restricted flow rate 15 l/min.
Projection: 300, 450 mm

51686/51689
Head shower with ceiling outlet DN 15
Ø 180 mm, with shower head rail,
restricted flow rate 15 l/min.
Projection: 100, 300 mm

53980
Hand shower
with anti limescale device
Functions:
– normal jet
– soft jet
– massage jet

59991
Wall bracket for hand shower
for shower hoses with conical nuts,
with adjustable tilt angle 20-65°
Projection: 97 mm

54941
Exposed part for angle valve DN 15/DN 20
complete with: handle, sleeve, rosette
and adjustable extension
(Angle valve DN 15/DN 20 to be
ordered separately)

54991
Wall bracket for hand shower
for shower hoses with conical nuts

54995
Shower hose DN 15
both ends fitted with conical nut
and twist-protection,
1250, 1600, 2000 mm

53947
Wall outlet for shower hose DN 15
suitable for all concealed fittings

PLAN

Surfaces:



chrome-plated



aluminium finish



stainless steel finish



14901



14907



14910



14958



14950



14953



14911 / 14914 / 14916



14913



14918 / 14919



14952



14953



14957



14921



14922



14955



14949



11649



14954

14901
Towel rail
600, 800 mm

14907
Grab bar/Towel rail (USA)
300 mm

14910
Shelf
with crystalline plate, underside matt
Dimensions (w x h):
220 x 100 mm
350 x 120 mm
550 x 120 mm

14958
Universal shelf
with crystal glass plate
Surface chrome-plated, stainless steel or
aluminium silver-anodized (E6 EV1)/chrome-plated
Dimensions (w x h): 210 x 115 mm

14950
Tumbler holder
complete with crystal glass tumbler

14953
Lotion dispenser
complete with crystal glass, matt
Capacity: approx. 250 ml

14911
Towel hook
with door buffer, black

14913
Towel hook panel
with 4 hooks

14918 / 14919
Towel holder
2-arms, swivelling
Projection: 300, 438 mm

14952
Lotion dispenser standing model
Capacity: approx. 250 ml

14953
Lotion dispenser wall model
Capacity: approx. 250 ml

14957
Foam soap dispenser
opal glass, matt
including foam soap (2 x 250 ml)
Capacity: approx. 250 ml

14914 / 14916
Towel hook

14922
Towel ring
small model

14955
Soap holder
complete with crystal glass dish


14949
Built in soap dispenser
for mounting on washbasin or washbasin worktop
Capacity: approx. 500 ml

11649
Soap dispenser
for mounting on washbasin or washbasin worktop,
including foam soap (2 x 500 ml),
also available for liquid soap
Capacity: approx. 500 ml
Height: 93 mm

14954
Lotion dispenser
Capacity: approx. 1,1 l



14909



14909

14909
Grab bar 135°
with soap holder,
right version/left version,
soap holder optionally in dark grey (RAL 7021),
light grey (RAL 7035) or white (RAL 9010)



14920



14923

14920
Towel holder
1-arm, fixed
Projection: 450 mm

14923
Towel holder
1-arm, fixed
Projection: 340 mm



14951



14975

14951
Lotion dispenser
complete with holder and pump,
for liquid soap
Capacity: approx. 280 ml
Dosage: approx. 0.5 ml/stroke

14975
Towel rack
shelf made of ESG glass
Width: 600 mm



14958



14959

14958
Shower basket
two parts: metal bracket and detachable
synthetic insert (soap resistant, unbreakable,
UV-protected)

14959
Shower basket with integrated glass scraper
three parts: metal bracket, detachable synthetic
insert (soap resistant, unbreakable, UV-protected)
and integrated glass scraper

Plastic insert and glass scraper
optionally in dark grey (RAL 7021),
light grey (RAL 7035) or white (RAL 9010)



14963



14967

14963
Toilet paper double holder
for 100/120 mm wide paper rolls

14967
Moisture box
with cover and housing made of metal,
with detachable synthetic insert box
(light grey) for maximum packing size
145 x 102 x 43 mm



04989

04989
Waste bin
complete with insert (dark grey)
and plastic lid
Capacity: 5 l

Surface casing/handle:
chrome finish (polished stainless steel)
stainless steel
aluminium lacquered
white lacquered (RAL 9010)

Surface lid:
dark grey (RAL 7021)
white (RAL 9010)



14960



14961



14962



04979



14982



04976



14963



14969



14985



14988



14995



34954



14972



14964



14966–14971



14977



04988



17649



06549



14980



14983



14960
Toilet paper holder
with cover,
for 100/120 mm wide paper rolls

04976
Hygiene bag dispenser
ABS plastic for max. 25 bags,
including first 25 bags

14972/14964
Toilet brush set
with removable plastic insert,
brush and spare brush head

14961
Toilet paper holder
theft-proof,
for 100/120 mm wide paper rolls

14963
Spare paper holder

14966
Doorplate
Symbol Ladies

14967
Doorplate
Symbol Gents

14968
Doorplate
Symbol Disabled

14971
Doorplate
Symbol Ladies/Gents

14962
Toilet paper holder
open form,
for 100/120 mm wide paper rolls

14969
Multiple toilet roll dispenser
for horizontal or vertical installation,
can be mounted for 2 rolls of 100/120 mm in width

14977
Sanitary waste bin
wall mounted
Capacity: 3 l

04988
Waste bin
with detachable black insert
Capacity: 5 l

04979
Clothes line
complete with wall mounting element
extendable up to max. 2.80 m

14985
Paper towel dispenser

14988
Waste bin
wall mounted
Capacity: 30 l

17649
Cosmetic mirror
non illuminated, with pivoting arm,
adjustable in three dimensions,
magnification factor x 2.5, Ø 190 mm

14982
Bathroom stool
also suitable for wet rooms
seat white, dark grey or light grey
Surface chrome-plated
or aluminium silver-anodized (E6 EV1)

14995
Hair dryer
with wall mounting element, 230 V
Features:
– On-off switch with indicator light
on the wall holder
– 3 heating levels up to max. 1800 W
– 2 speed levels
– Cold air button
– Overheating protection

06549
Wall light
complete with opal glass, matt
and bulbs 2 x 40 W E14

34954
Soap and disinfection liquid dispenser
dispenser size 0.5 l,
standard Euro bottle with integrated pump
(suitable for i.e. Bode Standard Euro 0.5 l disinfection liquid),
with removable plastic drip tray

14980
Tip-up seat
for wall mounting
tip-up seat
seat size: 360 mm wide
white, dark grey or light grey
Surface chrome-plated
or aluminium silver-anodized (E6 EV1)

14983
Tip-up seat
for wall mounting
tip-up seat
seat size: 370 mm wide
white, dark grey or light grey
Surface chrome-plated or aluminium laquered



14930 / 14932



14927



14934



14935



14924 / 14925



14936 / 14937



14939



14931 / 14941



14938



14940

14930
Shower curtain rail
300–2000 mm

14932
Connecting tube

14924
Tube angle piece 90°
for square shower tray

14925
Tube angle piece 90°
for quarter-circle shower tray

14931
Connecting piece
in dark grey or chrome-plated

14941
Ceiling support (set)
complete, consisting of:
– 1 x wall mounting set
– 1 x shower curtain rail
– 1 x connecting piece, 300–800 mm

14927
Curtain ring
in black or white

14936 / 14937
Set of shower curtain rails
for square shower tray 800 x 800 mm/900 x 900 mm
consisting of:
– 3 x wall mounting set
– 2 x shower curtain rail, 700 mm/800 mm
– 1 x tube angle piece 90° for square shower tray
– 1 x ceiling support, 400 mm
– 1 x connecting piece
– 2 x 10 shower curtain rings, white

14938
Set of shower curtain rails
for quarter-circle shower tray 900 x 900 mm
consisting of:
– 3 x wall mounting set
– 2 x shower curtain rail, 300 mm
– 1 x tube angle piece 90°
for quarter-circle shower tray
– 1 x ceiling support, 400 mm
– 1 x connecting piece
– 2 x 10 shower curtain rings, white


14934
Wall mounting set
with cover, for slanted ceilings
adjustable between 10 to 80 degrees

14935
Wall mounting set
with decor cover

14939
Set of shower curtain rails
for square shower tray 1000 x 1000 mm/1200 x 1200 mm
consisting of:
– 2 x wall mounting set
– 2 x shower curtain rail, 900 mm/1100 mm
– 1 x tube angle piece 90° for square shower tray
– 1 x ceiling support, 400 mm
– 2 x 10 shower curtain rings, white

14940
Set of shower curtain rails
for square shower tray 1000 x 1000 mm/1200 x 1200 mm
consisting of:
– 2 x wall mounting set
– 2 x shower curtain rail, 900 mm/1100 mm
– 1 x shower curtain rail, 800 mm/1000 mm
– 2 x tube angle piece 90° for square shower tray
– 2 x ceiling support, 400 mm
– 3 x 10 shower curtain rings, white

Colour variations shower curtain

 white
PLAN uni and PLAN maxx

 light grey
PLAN uni

 Ecru
PLAN uni

 truffle
PLAN uni

 anthracite
PLAN uni

 black
PLAN uni



14945 / 14943 / 14944 / 14946 / 14947 / 34948

14943 / 14944
Shower curtain PLAN uni*
100% Trevira, 80 g/m², shower-proof, fungicidal,
anti-bacterial, anti-static, washable at 30 °C,
can be disinfected at 60 °C (shrinkage rate 1-2%),
ironing possible (shrinkage 1-3%), tested for harmful
substances according to OEKO-Tex Standard 100
Colours: white, ecru, light grey, truffle,
anthracite, black
Full length: 1800, 2000 mm
Width: 1400, 2000, 3000 mm

14943/14944
Shower curtain PLAN 60°
100% Trevira, 80 g/m², vertical seams,
reinforced stainless steel eyelets,
distance between the eyelets approx. 20 cm,
roll hem stainless steel weighted, 50 g per metre,
shower-proof, fungicidal, anti-bacterial, anti-static,
washable at 60 °C, shrinkage rate 1-2%,
tested for harmful substances according to
OEKO-Tex Standard 100
Colour: white
Full length: 1800, 2000 mm
Width: 1400, 2000, 3000 mm

14943 / 14944
Shower curtain PLAN Flame CS*
highly flame resistant according to DIN 4102/B1
100% Trevira, 80 g/m², shower-proof, fungicidal,
anti-bacterial, anti-static, washable at 30 °C,
can be disinfected at 60 °C (shrinkage rate 1-2%),
ironing possible (shrinkage 1-3%), tested for harmful
substances according to OEKO-Tex Standard 100
Colour: off-white
Full length: 1800, 2000 mm
Width: 1400, 2000, 3000 mm

14946 / 14947 / 34948
Shower curtain PLAN maxx*
100% polyester, 75 g/m², shower-proof, fungicidal,
anti-bacterial, washable at 30 °C
(Shrinkage rate 3%), ironing possible
(shrinkage 1-3%), tested for harmful substances
according to OEKO-Tex Standard 100
Colour: white
Full length: 670, 1800, 2000 mm
Width: 1400, 1800, 2000, 3000 mm

14945
Shower curtain PLAN*
all sizes are custom made.
Please specify: material, colour,
full length and width

***Notes on production characteristics:**
Vertical seams, reinforced stainless steel eyelets,
distance between the eyelets approx. 20 cm,
roll hem stainless steel weighted, 50 g per metre,
complete with curtain rings, white.

Notes on sizes: The sizes indicated are the sizes
of the finished curtain. To prevent the curtain from
touching the ground we recommend a distance from
curtain to floor of approx. 30 mm. Distance between
the middle of the curtain rod and the upper edge of
the curtain approx. 40 mm. The width of the curtain
should be approx. 1.3 to 1.5 times the length of the
shower curtain rod.

PLAN CARE

Surfaces:



chrome-plated




aluminium silver-anodized (E6 EV1)
or aluminium finish



34940



34910




34912



34901



34907




34911



34906




34906

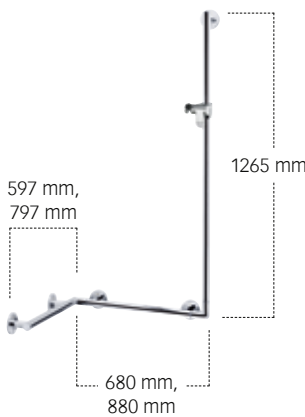

34908



34914

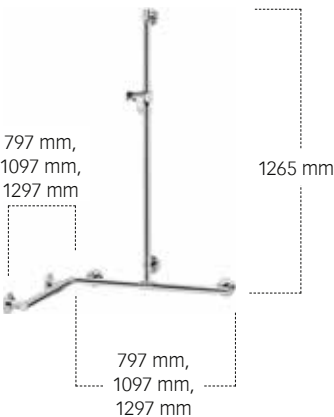

34915



34940
Spray guard
to be hooked on rail system or grab rails
complete with shower curtain PLAN maxx
(670 x 800 mm)

34910
Hand shower bracket
for shower rail, height adjustable

34912
Hand shower sliding rail
complete with shower bracket
900, 1100 mm

34901
Grab bar /Towel rail (USA)
for horizontal or vertical installation
300, 400, 500, 600, 700, 800, 900, 1000, 1100 mm

34907
Angle bar 135°
may be used on the left or right
300, 400 mm

34911
Corner rail for shower/bath
usable on left or right
Dimensions (w x h):
400 x 400 mm
400 x 600 mm
600 x 600 mm

34906
Angle bar 90°
complete with shower bracket
usable as shower rail on left or right
Dimensions (w x h): 400 x 1100 mm

34908
Rail system
complete with shower bracket
usable on left or right
Dimensions (w x h x d):
400 x 400 x 1100 mm
400 x 600 x 1100 mm
600 x 400 x 1100 mm
600 x 600 x 1100 mm

34906
Angle bar 90°
usable on left or right
Dimensions (w x h): 300 x 600 mm

34914
Rail system
complete with shower bracket
shower rail flexible positioning of sliding rail
prior to final installation
Dimensions (w x h x d):
600 x 600 x 1100 mm
600 x 900 x 1100 mm
900 x 600 x 1100 mm
900 x 900 x 1100 mm
900 x 1100 x 1100 mm
1100 x 900 x 1100 mm

34915
Rail system
complete with shower bracket
shower rail flexible positioning of sliding rail
prior to final installation
Dimensions (w x h x d):
600 x 600 x 1100 mm
600 x 900 x 1100 mm
900 x 600 x 1100 mm
900 x 900 x 1100 mm
900 x 1100 x 1100 mm
1100 x 900 x 1100 mm

PLAN CARE

Surfaces:



chrome-plated



aluminium silver-anodized (E6 EV1)
or aluminium finish

Colour variations



dark grey



light grey



white



34979
Back rest
for use on WC,
consists of wall rail (600 mm)
and back rest

34983
Tip-up seat
for wall mounting
tip-up seat,
seat size 450 mm wide

Surface chrome-plated or aluminium lacquered

34981
Tip-up seat with back rest
for hanging in handles as well as shower
and bath tub handles, tip-up seat,
seat size 360 mm wide

34982
Tip-up seat with back rest
for wall mounting
tip-up seat,
seat size 360 mm wide

Colour variations pivoted supporting rail




dark grey



light grey



white

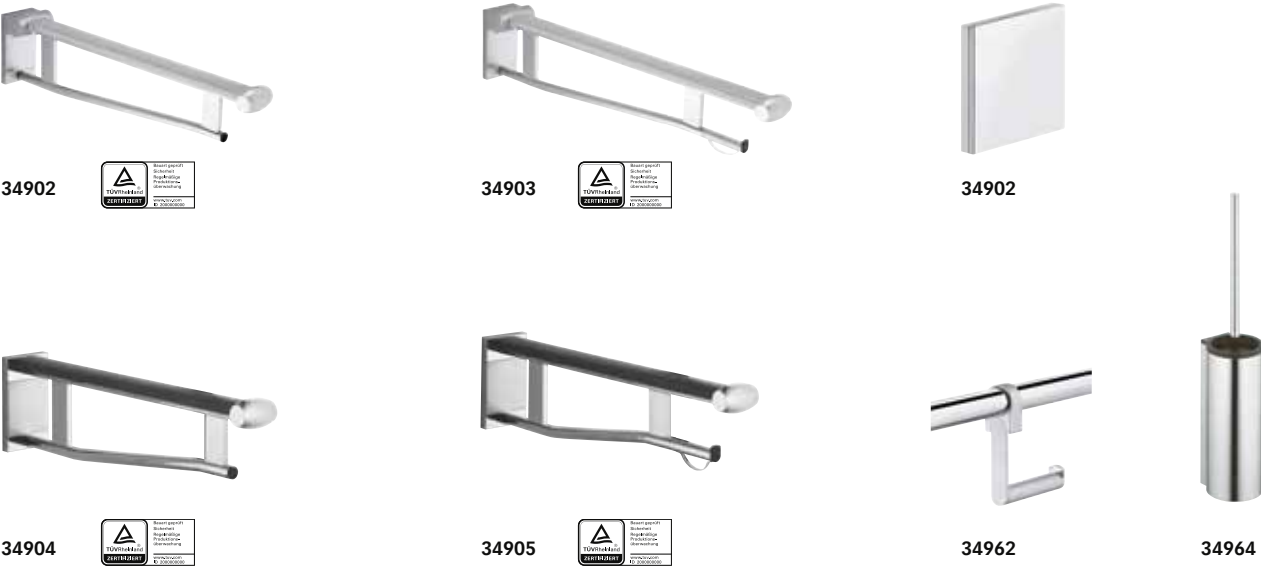

34902
Pivoted supporting rail for wash basin
lifts up,
braked version,
with synthetic covered support
Projection: 650 mm

34904
Supporting rail for wash basin
fixed,
with synthetic covered support
Projection: 450/650 mm

34903
Pivoted supporting rail for WC*
lifts up,
braked version,
with synthetic covered support,
removable toilet paper holder with rollbrake
Projection: 700/850 mm

34905
Supporting rail for WC*
fixed,
with synthetic covered support,
removable toilet paper holder with rollbrake
Projection: 700/850 mm

34902
Cover plate
for fastening holes for supporting rails
and pivoted supporting rails

34962
Toilet paper holder
for mounting on an angle bar


34964
Toilet brush set
complete with synthetic insert,
brush with extended handle and
spare brush head

*also with integrated WC flushing mechanism (right/left) for Geberit, Grohe, Sanit, Tece and Viega

Surfaces:


chrome-plated /
aluminium lacquered
(RAL 9006)

chrome-plated /
white lacquered
(RAL 9010)

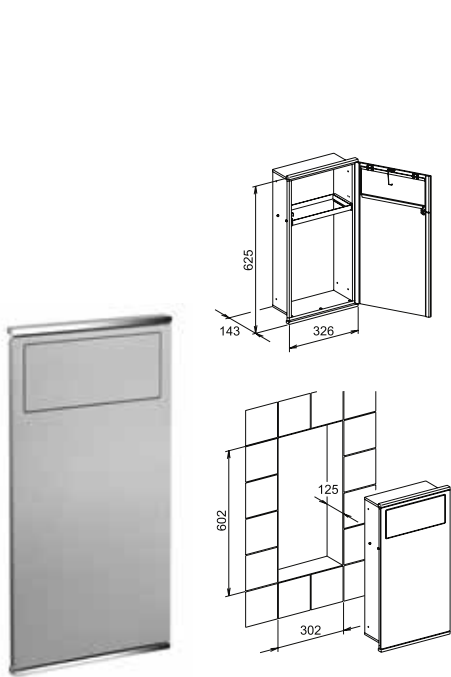


44988

44988
Module Washstand 1
consisting of:
– Waste bin

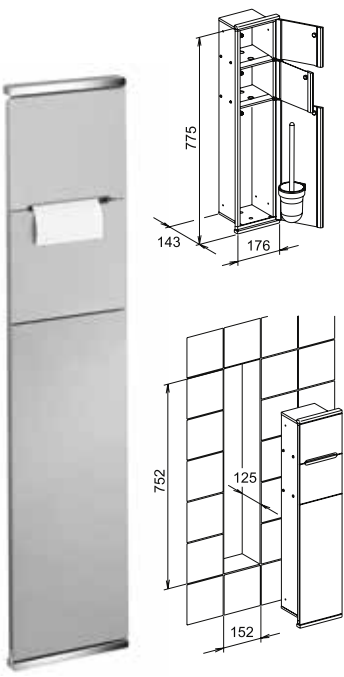


44964

44964
Module WC 1
consisting of:
– Toilet brush holder
– Toilet roll holder
– Spare toilet roll compartment

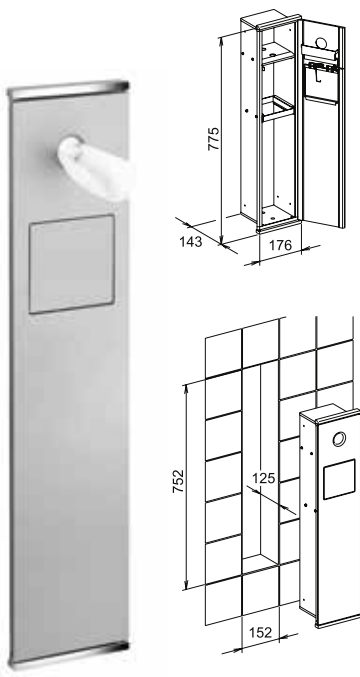


44976

44976
Module WC 2
consisting of:
– Sanitary bag dispenser
(including the first pack of hygiene bags)
– Sanitary waste bin

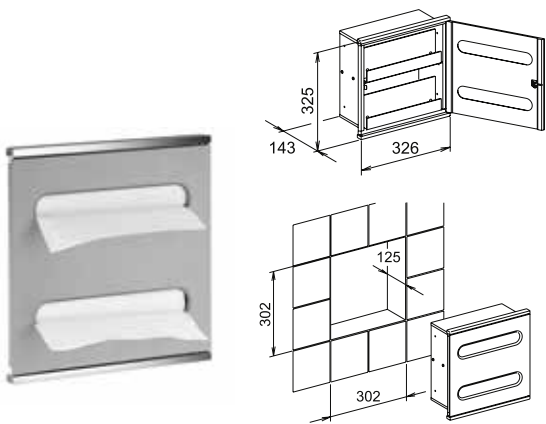

44985

44985
Module Washstand 2
consisting of:
– 2 Paper towel dispensers
(each for max. 100 paper towels)

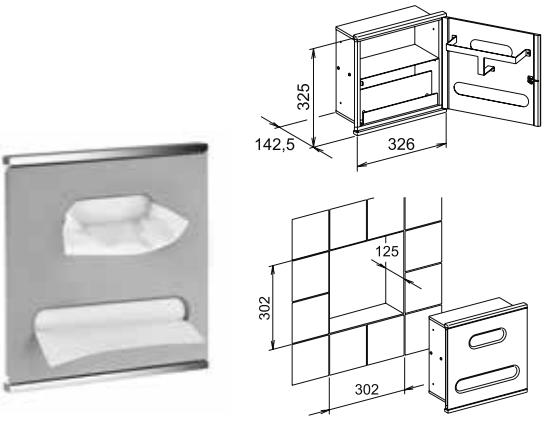

44977

44977
Module Washstand 3
consisting of:
– Tissue box (for max. 150 tissues)
– Paper towel dispenser
(for max. 100 paper towels)

chrome-plated

bronze polished

bronze brushed

nickel polished

nickel brushed


black chrome polished

black chrome brushed

stainless steel finish

aluminium finish

SINGLE LEVER MIXER

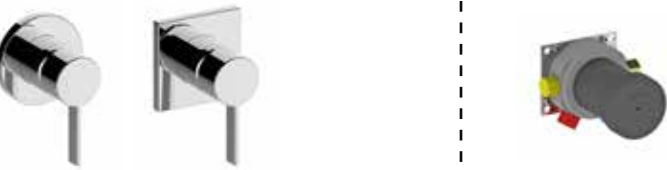

1 WATER DRAW-OFF POINT

Wall outlet for shower hose



Wall outlet for shower hose with hand shower bracket



2 WATER DRAW-OFF POINTS

2-way diverter valve



2-way diverter valve with wall outlet for shower hose



2-way diverter valve with wall outlet for shower hose and hand shower bracket



3 WATER DRAW-OFF POINTS

3-way diverter valve



3-way diverter valve with wall outlet for shower hose



3-way diverter valve with wall outlet for shower hose and hand shower bracket



All stop and diverter valves also available with handle IXMO Comfort.

THERMOSTAT



1 WATER DRAW-OFF POINT

Stop valve



Stop valve with wall outlet for shower hose



Stop valve with wall outlet for shower hose and hand shower bracket



2 WATER DRAW-OFF POINTS

2-way diverter valve



2-way diverter valve with wall outlet for shower hose



2-way diverter valve with wall outlet for shower hose and hand shower bracket



2-way stop and diverter valve



2-way stop and diverter valve with wall outlet for shower hose



2-way stop and diverter valve with wall outlet for shower hose and hand shower bracket



3 WATER DRAW-OFF POINTS

3-way diverter valve



3-way diverter valve with wall outlet for shower hose



3-way diverter valve with wall outlet for shower hose and hand shower bracket



3-way stop and diverter valve



3-way stop and diverter valve with wall outlet for shower hose



3-way stop and diverter valve with wall outlet for shower hose and hand shower bracket





59551
Single lever mixer DN 15
Mixing cartridge with ceramic sealing gaskets, temperature controlled, set complete with: handle, sleeve, rosette (round or square) and installation unit, suitable for rough part no. 59551/000070



59551
Installation unit for single lever mixer DN 15
Rough part for recessed installation



59553
Thermostat battery DN 15
Set complete with: handle, sleeve and rosette (round or square) suitable for rough part no. 59553/000070



59553
Installation unit for thermostat battery DN 15
Rough part for recessed installation



59547
Wall outlet for shower hose DN 15
with round or square decorative disc, intrinsically safe against backflow
Projection: 55 mm



59592
Wall outlet for shower hose with hand shower bracket DN 15
for shower hoses with fitted conical end brackets, with round or square decorative disc, intrinsically safe against backflow



59541
Stop valve DN 15
Set complete with: handle, casing, rosette (round or square) and stop cock suitable for rough part no. 59541/000070



59541
Installation unit for stop valve DN 15
Rough part for recessed installation



59541
Stop valve with wall outlet for shower hose DN 15
Set complete with: handle, casing, rosette (round or square) and stop cock, intrinsically safe against backflow, suitable for rough part no. 59541/000170



59541
Installation unit for stop valve with wall outlet for shower hose DN 15
Rough part for recessed installation



59541
Stop valve with wall outlet for shower hose and hand shower bracket DN 15
Set complete with: handle, casing, rosette (round or square) and stop cock, intrinsically safe against backflow, suitable for stop cock no. 59541/000170



59541
Installation unit for stop valve with wall outlet for shower hose DN 15
Rough part for recessed installation



59556
2-way diverter valve DN 15
Set complete with: handle, casing, rosette (round or square) and diverter valve suitable for rough part no. 59556/000070



59556
Installation unit for 2-way diverter valve DN 15
Rough part for recessed installation



59556
2-way diverter valve with wall outlet for shower hose DN 15
Set complete with: handle, casing, rosette (round or square) and diverter valve, intrinsically safe against backflow, suitable for rough part no. 59556/000170



59556
Installation unit for 2-way diverter valve with wall outlet for shower hose DN 15
Rough part for recessed installation



59556
2-way diverter valve with wall outlet for shower hose and hand shower bracket DN 15
Set complete with: handle, casing, rosette (round or square) and diverter valve, intrinsically safe against backflow, suitable for rough part no. 59556/000170



59556
Installation unit for 2-way diverter valve with wall outlet for shower hose DN 15
Rough part for recessed installation



59557
2-way stop and diverter valve DN 15
Set complete with: handle, casing, rosette (round or square) and stop and diverter valve suitable for rough part no. 59556/000070



59556
Installation unit for 2-way diverter valve DN 15
Rough part for recessed installation



59557
2-way stop and diverter valve with wall outlet for shower hose DN 15
Set complete with: handle, casing, rosette (round or square) and stop and diverter valve, intrinsically safe against backflow, suitable for rough part no. 59556/000170



59556
Installation unit for 2-way diverter valve with wall outlet for shower hose DN 15
Rough part for recessed installation



59557
2-way stop and diverter valve with wall outlet for shower hose and hand shower bracket DN 15
Set complete with: handle, casing, rosette (round or square) and stop and diverter valve, intrinsically safe against backflow, suitable for rough part no. 59556/000170



59556
Installation unit for 2-way diverter valve with wall outlet for shower hose DN 15
Rough part for recessed installation

All stop and diverter valves also available with handle IXMO Comfort.



59548
3-way diverter valve DN 15
Set complete with:
handle, casing, rosette (round or square) and diverter valve
suitable for rough part no. 59548/000070



59548
Installation unit for
3-way diverter valve DN 15
Rough part for recessed installation



59548
3-way diverter valve with wall outlet for shower hose DN 15
Set complete with:
handle, casing, rosette (round or square) and diverter valve,
intrinsically safe against backflow,
suitable for rough part no. 59548/000170



59548
Installation unit for
3-way diverter valve with wall
outlet for shower hose DN 15
Rough part for recessed installation



59548
3-way diverter valve with wall outlet for shower hose
and hand shower bracket DN 15
Set complete with:
handle, casing, rosette (round or square) and diverter valve,
intrinsically safe against backflow,
suitable for rough part no. 59548/000170



59548
Installation unit for
3-way diverter valve with wall
outlet for shower hose DN 15
Rough part for recessed installation



59549
3-way stop and diverter valve DN 15
Set complete with:
handle, casing, rosette (round or square) and stop and diverter valve
suitable for rough part no. 59548/000070



59548
Installation unit for
3-way diverter valve DN 15
Rough part for recessed installation



59549
3-way stop and diverter valve with wall outlet
for shower hose DN 15
Set complete with:
handle, casing, rosette (round or square) and stop and diverter valve,
intrinsically safe against backflow,
suitable for rough part no. 59548/000170



59548
Installation unit for
3-way diverter valve with wall
outlet for shower hose DN 15
Rough part for recessed installation



59549
3-way stop and diverter valve with wall outlet for shower hose
and hand shower bracket DN 15
Set complete with:
handle, casing, rosette (round or square) and stop and diverter valve,
intrinsically safe against backflow,
suitable for rough part no. 59548/000170



59548
Installation unit for
3-way diverter valve with wall
outlet for shower hose DN 15
Rough part for recessed installation



EDITION 400



EDITION 11



PLAN S



PLAN Blue



ELEGANCE



COLLECTION MOLL

59551

59551
Single lever mixer /handles
handles matching the recessed
single lever mixers no. 59551/019501,
59551/019502



59541/59556/59557/59548/59549



59545



59547

Handle IXMO Comfort Plus
for all stop and diverter valves,
with adjustment facilities for
twisted recessed wall installation
of the basic unit

- 59541** – for stop valves
- 59556** – for 2-way diverter valves
- 59557** – for 2-way stop and diverter valves
- 59548** – for 3-way diverter valves
- 59549** – for 3-way stop and diverter valves

Note:
for the vertical alignment of the handle

59545
Bath filler/spout DN 15
with round or square rosette,
suitable for all concealed fittings
Projection: 130, 180 mm


59547
Universal installation unit G 1/2
for an easy fitting of products with 1/2 inch
connection in combination with mounting rail,
internal thread G 1/2



59516



59916

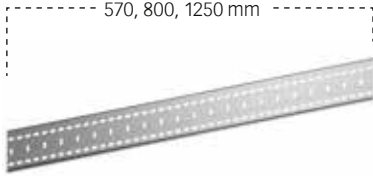


59570

59516
Single lever basin mixer
concealed fitting DN 15,
cartridge mixer with ceramic sealing gaskets,
aerator SLIM SSR M 24 x 1,
adjustable flow angle,
flow rate limited to 7,6 l/min.
(essential for installation:
rough part article No. 59916
to be ordered separately)
Projection: 187, 219, 265 mm

59916
Installation unit for single lever basin mixer
Rough part for recessed installation
Installation depth: 70-100 mm

59570
IXMO Mounting rail
for an easy and steplessly adjustable installation
of the IXMO function units
Length: 570, 800, 1250 mm

All stop and diverter valves also available with handle IXMO Comfort.



59553



59949



59551




59553



59556



59551



59949



59556



59552



59552



51187



51587



59587

59553
Extension rosette
25 mm, round or square, brass,
for installation between tiles and finish set
for installation of stop and diverter valve
in walls with a low wall thickness,
installation depth 55-80 mm,
suitable for rough part art. no. 59553 000070

59551
Extension rosette
25 mm, round or square, brass,
for installation between tiles and finish set
for installation of stop and diverter valve
in walls with a low wall thickness,
installation depth 55-80 mm,
suitable for rough part art. no. 59541/000070,
59541/000170, 59548/000070, 59548/000170,
59556/000070, 59556/000170

59551
Extension rosette
25 mm, round or square, brass,
with red/blue marker, for installation between tiles
and finish set for installation of stop and diverter
valve in walls with a low wall thickness,
installation depth 55-80 mm,
suitable for rough part art. no. 59556/000070

59949
Tube interrupter
in accordance with DIN EN 1717
in a wall mounting box with
chrome-plated cover (round)

Note:
Behind the tube interrupter is no shutoff allowed.
Installation only in a vertical position.

59949
Cover cap
round (90 mm Ø) or square (90 x 90 mm),
for tube interrupter article no. 59949/000070

59551
Extension set for single lever mixer
30 mm (installation depth 110-140 mm),
for base structure 59551/000070

59553
Extension set for thermostatic mixer
30 mm (installation depth 110-140 mm),
for base structure 59553/000070

59556
Extension set for stop and diverter valve
30 mm (installation depth 110-140 mm),
for base structure 59541/000070,
59556/000070, 59548/000070

59556
Extension set for stop and diverter valve
with wall outlet for shower hose
30 mm (installation depth 110-140 mm),
for base structure 59541/000170,
59556/000170, 59548/000170

59552
Set consisting of:

– **Single-lever mixer with wall outlet**
for shower hose DN 15
Mixing cartridge with ceramic sealing gaskets,
temperature limiter and flow rate limiter,
wall outlet for shower hose intrinsically safe against
backflow in accordance with DIN EN 1717,
90 mm projection
Finish set consisting of:
lever, sleeve, decor disc (round or rectangular),
installation unit and wall outlet for shower hose

– **In-wall installation unit for single-lever mixer**
with wall outlet for shower hose DN 15
Rough part for recessed installation,
installation depth 65–95 mm

Classification according to
noise group I and flow rate class A

51187
Shower set
consisting of:
– 900 mm rail with sliding bracket for shower head,
height adjustment with handle,
tilt angle adjustable to any position
– hand shower with normal jet
– 1600 mm shower hose
– tile compensation plate (5 mm)

51587
Shower set
consisting of:
– 900 mm rail with sliding bracket for shower head,
height adjustment with handle,
tilt angle adjustable to any position
– hand shower with normal, soft and massage jet
– 1600 mm shower hose
– tile compensation plate (5 mm)

59587
Shower set
consisting of:
– 800 mm rail with sliding bracket for shower head,
height adjustment with handle,
tilt angle adjustable to any position
– hand shower with normal jet
– 1600 mm shower hose
– tile compensation plate (5 mm)

Surface:



chrome-plated



51602



51604



51608



SENSOR

51611



51601



SENSOR

51613




51616



51620



51609



51620



51645



51630

51602
Single lever basin mixer 120
with/without pop-up waste 1 1/4 Inch,
1-hole installation, cartridge mixer
with ceramic sealing gaskets
aerotator M 24 x 1
Flow rate limited to 7,6 l/min.

51604
Single lever basin mixer 90
with/without pop-up waste 1 1/4 Inch,
1-hole installation, cartridge mixer
with ceramic sealing gaskets
aerotator M 24 x 1
Flow rate limited to 7,6 l/min.

51608
Pillar tap 90
without pop-up waste,
1-hole installation, lever head action 90°
with ceramic sealing gaskets

51611
Infrared basin mixer 120
with/without pop-up waste 1 1/4 Inch,
1-hole installation, infrared sensor,
manual water-stop for cleaning,
with temperature control,
aerotator M 24 x 1
either battery or mains operated

51601
Extension to single lever basin mixer
matches single lever basin mixers 51602 and 51604,
pillar tap 51608 and infrared basin mixers 51611
and 51613

Please note: Single lever basin mixer to be
ordered separately!

51613
Infrared basin mixer 120
without pop-up waste,
1-hole installation, infrared sensor,
manual water-stop for cleaning,
without temperature control,
aerotator M 24 x 1
either battery or mains operated

51616
Single lever basin mixer
concealed fitting DN15
cartridge mixer with ceramic sealing gaskets
and temperature control,
aerator SLIM SSR M 24 x 1,
adjustable flow angle
(essential for installation: rough part
article no. 51116 to be ordered separately)

Note:
flexible arrangement of lever and spout possible
during assembly.

51620
Single lever bath tub mixer with head shower
exposed fitting
cartridge mixer with ceramic sealing gaskets,
with automatic diverter, with backflow preventer,
head shower swivelling, Ø 180 mm,
hand shower with normal, soft and massage jet,
with sliding bracket, wall bracket and
shower hose, 1600 mm

51609
Single lever bidet mixer
with pop-up waste 1 1/4 Inch,
1-hole installation, cartridge mixer
with ceramic sealing gaskets
aerotator M 24 x 1

51620
Single lever bath tub mixer
exposed fitting
cartridge mixer with ceramic sealing gaskets,
with automatic diverter and backflow preventer

51645
Bath filler/spout DN20
suitable for all concealed fittings
Projection: 173, 223 mm

51630
Single lever bath tub and shower mixer
4-hole bath deck-mounted
cartridge mixer with ceramic sealing gaskets,
with automatic diverter and backflow preventer
concealable hand shower with normal, soft
and massage jet



51624



51624



51626



51626



51671



51673



51672



51674



51686/51689



51686/51688



51680



54995

51624
Single lever bath shower mixer with head shower
exposed fitting
cartridge mixer with ceramic sealing gaskets, diverter head shower/hand shower with ceramic sealing gaskets, with backflow preventer, head shower swivelling, Ø 180 mm, hand shower with normal-, soft- and massage jet, with sliding bracket, wall bracket and shower hose, 1600 mm

51624
Single lever shower mixer DN 15
exposed fitting
cartridge mixer with ceramic sealing gaskets, with backflow preventer

51626
Thermostat battery for shower
exposed fitting
handle with 50% water consumption regulation, safety cut-off at 38 °C, with backflow preventer

51626
Thermostat battery with head shower
exposed fitting
safety cut-off at 38 °C, diverter head shower/hand shower with ceramic sealing gaskets, with backflow preventer
head shower swivelling, Ø 180 mm, hand shower with normal-, soft- and massage jet, with sliding bracket, wall bracket and shower hose, 1600 mm

51671
Single lever shower mixer
concealed fitting
set complete with: handle, sleeve, rosette and installation unit
suitable for rough part no. 59970 (Flexx Boxx) (Flexx Boxx to be ordered separately)

51673/51674
Thermostat battery
concealed fitting
with ceramic cut-off valve (51673), with ceramic cut-off and switch valve (51674), safety cut-off at 38 °C, set complete with: handle, sleeve, diverter, rosette and installation unit
suitable for rough part no. 59970 (Flexx Boxx) (Flexx Boxx to be ordered separately)




51672
Single lever bath tub and shower mixer
concealed fitting
with/without safety device
set complete with: handle, sleeve, diverter, rosette and installation unit
suitable for rough part no. 59970 (Flexx Boxx) (Flexx Boxx to be ordered separately)

51686/51689
Head shower with ceiling outlet DN 15
Ø 180 mm, with shower head rail, restricted flow rate 15 l/min.
Projection: 100, 300 mm

51686/51688
Overhead shower with wall outlet DN 15
Ø 180 mm, with shower head rail, restricted flow rate 15 l/min.
Projection: 300, 450 mm

51680
Hand shower
with anti limescale device
Functions:
– normal jet
– soft jet

54995
Shower hose DN 15
both ends fitted with conical nut and twist-protection
1250, 1600, 2000 mm

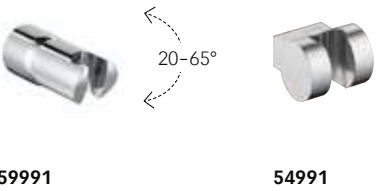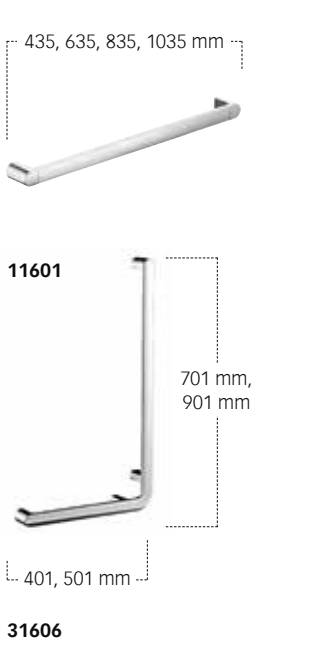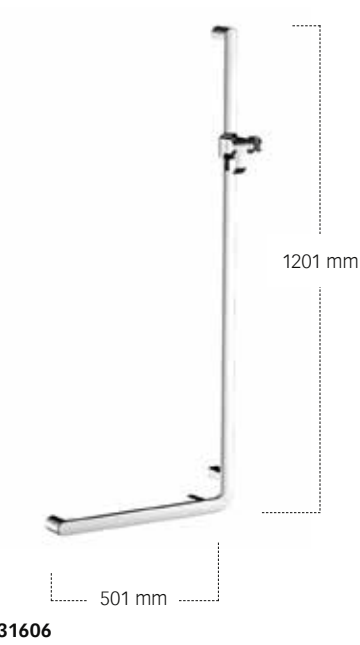

31606
Angle bar 90°
for use as shower rail
complete with shower bracket
usable as shower rail on left or right
Dimensions (w x h): 400 x 1100 mm

59991
Wall bracket for hand shower
for shower hoses with conical nuts,
with adjustable tilt angle 20-65°
Projection: 97 mm

54991
Wall bracket for hand shower
for shower hoses with conical nuts

31614
Rail system
complete with shower bracket
shower rail flexible positioning of
sliding rail prior to final installation
Dimensions (w x h):
600 x 1100 mm
800 x 1100 mm
1000 x 1100 mm

54941
Exposed part for angle valve DN 15/DN 20
complete with: handle, sleeve, rosette
and adjustable extension
(Angle valve DN 15/DN 20
to be ordered separately)

54947
Wall outlet for shower hose DN 15
suitable for all concealed fittings

51685
Hand shower sliding rail
consisting of:
– wall rail, 900 mm
– sliding bracket for shower head
– height adjustment via handle,
tilting angle adjustable
– spacer disc (5 mm)

51687
Hand shower sliding rail set
consisting of:
– rail with sliding bracket, 900 mm
– height adjustment via handle,
tilting angle adjustable
– spacer disc (5 mm)
– hand shower with normal jet and soft jet
– shower hose, 1600 mm

11601
Towel rail
400, 600, 800, 1000 mm

31606
Angle bar 90°
optionally left and right version
Dimensions (w x h):
300 x 600 mm
400 x 800 mm

11618/11620
Towel holder
2-arms, swivelling
Projection: 340, 450 mm

11607
Grab bar/Towel rail (USA)
300 mm

11610
Shelf
with crystal or crystalline glass shelf
Dimensions (w x h x d):
360 x 131 x 10 mm
600 x 131 x 10 mm
700 x 131 x 10 mm
950 x 131 x 10 mm

11621
Towel ring
Projection: 95 mm

31601
Grab bar/Towel rail (USA)
400, 500, 600, 700, 800, 900, 1000, 1100 mm

11613/11614
Towel hook
double, 34 mm

11615
Towel hook
59 mm

11616
Robe hook
82 mm

11649
Soap dispenser
for mounting on washbasin or washbasin worktop,
including foam soap (2 x 500 ml),
also available for liquid soap
Capacity: approx. 500 ml
Height: 93 mm



11650



11652



11653



11660



11664



11662



11663



11654



11657



11658




11669



11667



11655



11675



17676



17677



01680



11682



11692

11650
Tumbler holder/
Tumbler holder table model
complete with crystal glass tumbler, matt

11654
Lotion dispenser/
Lotion dispenser table model
opal glass, matt
Capacity: approx. 220 ml

11655
Soap holder/
Soap holder table model
complete with removable crystal glass dish, matt

11652
Lotion dispenser
complete with plastic cup, matt
also suitable for the shower
Capacity: approx. 180 ml

11652
Lotion dispenser
complete with crystal glass cup, matt
Capacity: approx. 180 ml

11657
Sponge basket for corner installation
metal basket with removable insert
in white or anthracite
Dimensions (w x h x d): 180 x 180 x 70 mm

11675
Towel rack
620 mm

11653
Foam soap dispenser/
Foam soap dispenser table model
opal glass, matt
including foam soap (2 x 500 ml)
Capacity: approx. 220 ml

11658
Sponge basket
metal basket with removable insert
in white or anthracite
Dimensions (w x h x d): 239 x 105 x 70 mm

17676
Cosmetic mirror
illuminated, wall model,
optional with mains connection through wall socket
or with spiral cord and plug,
1 x 8 W energy efficient lamp
magnification factor x 5, Ø 207 mm

17677
Cosmetic mirror
illuminated, table model,
with power lead (1,70 m),
1 x 8 W energy-efficient light lamp
magnification factor x 5, Ø 207 mm

11660
Toilet paper holder
with lid,
for 100/120 mm wide paper rolls

11669
Toilet brush set
complete with crystal glass insert, matt,
brush and spare brush head

01680
Tip-up seat
with Keucolit-seat, white

11664
Toilet brush set
with lid,
complete with synthetic insert,
brush and spare brush head

11667
Moisture box
comes with porcelain box, white


11682
Bathroom stool
chrome-plated, walnut veneer

11662
Toilet paper holder
open form,
for 100/120 mm wide paper rolls


11663
Spare paper holder

11692
Wall light
horizontal or vertical installation,
mirrored front panel, both task lighting and
moodlight, switched separately via room switch,
fluorescent lamps
Illumination/Dimensions (w x h x d):
2 x 14 W T5/700 x 70 x 66 mm
2 x 21 W T5/950 x 70 x 66 mm


Glass colour variations




56161




56162




56163

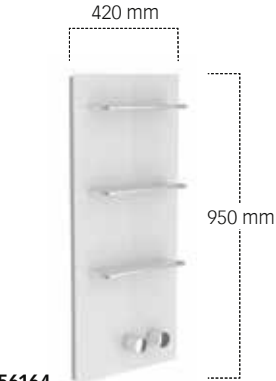

56164

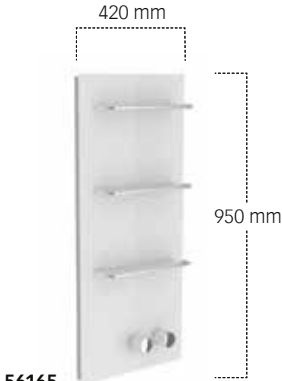

56165

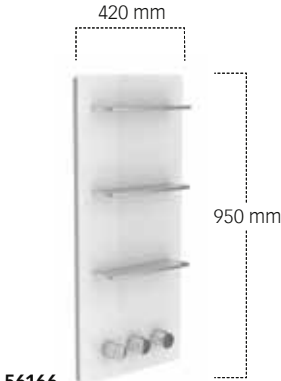

56166

56161
Shower and bathtub board with thermostat battery DN20
Finish set for the regulation of 1 user handles as desired left or right complete with:
– Mounting frame
– Panel made of ESG glass, with frame and one shelf made of aluminium
– Knob for thermostat with safety cut-off at 38 °C
– Shut-off handle
Dimensions (w x h): 800 x 200 mm (essential for installation: rough part article no. 56161 000071 to be ordered separately)

56164
Shower board with thermostat battery DN20
Finish set for the regulation of 1 user handles right, complete with:
– Mounting frame
– Panel made of ESG glass, with frame and three shelves made of aluminium
– Knob for thermostat with safety cut-off at 38 °C
– Shut-off handle
Dimensions (w x h): 420 x 950 mm (essential for installation: rough part article no. 56161 000071 to be ordered separately)

56162
Shower and bathtub board with thermostat battery DN20
Finish set for the regulation of 2 users handles as desired left or right with/without safety device complete with:
– Mounting frame
– Panel made of ESG glass, with frame and one shelf made of aluminium
– Knob for thermostat with safety cut-off at 38 °C
– Shut-off and adjustment handle
Dimensions (w x h): 800 x 200 mm (essential for installation: rough part article no. 56162 000072 to be ordered separately)

56165
Shower board with thermostat battery DN20
Finish set for the regulation of 2 users handles right, complete with:
– Mounting frame
– Panel made of ESG glass, with frame and three shelves made of aluminium
– Knob for thermostat with safety cut-off at 38 °C
– Shut-off and adjustment handle
Dimensions (w x h): 420 x 950 mm (essential for installation: rough part article no. 56162 000072 to be ordered separately)

56163
Shower and bathtub board with thermostat battery DN20
Finish set for the regulation of 3 users handles as desired left or right complete with:
– Mounting frame
– Panel made of ESG glass, with frame and one shelf made of aluminium
– Knob for thermostat with safety cut-off at 38 °C
– Shut-off handle
– Adjustment grip
Dimensions (w x h): 800 x 200 mm (essential for installation: rough part article no. 56163 000073 to be ordered separately)

56166
Shower board with thermostat battery DN20
Finish set for the regulation of 3 users handles right, complete with:
– Mounting frame
– Panel made of ESG glass, with frame and three shelves made of aluminium
– Knob for thermostat with safety cut-off at 38 °C
– Shut-off handle
– Adjustment grip
Dimensions (w x h): 420 x 950 mm (essential for installation: rough part article no. 56163 000073 to be ordered separately)



59948



59982



59993



59996

59948
Exposed part for 3-way diverter valve UP
complete with:
handle, sleeve, rosette (round/square)

59982
Waterfall shower
for wall connection G 1/2 Inch restricted flow rate 25 l/min.

59993
Wall outlet for shower hose DN20
with wall bracket, for SPA hose, suitable for all concealed fittings with backflow preventer

59996
SPA hose
with chrome-plated shower bracket for wall connection elbow and chrome-plated hose connection 3/4"

The extraordinary surface characteristics and extremely fine colour nuances of our products can only be reproduced to a certain degree in print. Only the original KEUCO products, which can be viewed in sanitary trade dealers' showrooms, can provide you with an optimum impression.

Reproduction and copying, even if only excerpts, are only permitted by explicit permission of the manufacturer, and with the inclusion of source information.
KEUCO GmbH & Co. KG, Postfach 1365, D-58653 Hemer

We reserve the right to make engineering changes for the purpose of improvement, as well as colour and design changes that are deemed necessary. Errors and omissions excepted.

Concept, design, text and lithography: KONTRAST Communication Services GmbH, Düsseldorf
Photography: Stephan Schacher, New York; Eva Gaida, Aalen; Casa, Münster; PF-Medien, Menden
Printing: Meinders & Elstermann GmbH & Co. KG, Belm, Osnabrück
Printed on GALAXI Keramik. Supplied by Papier Union.

For more information please visit www.keuco.de